


Fuji USER MANUAL

DRILLS

MODELS : FRD-6S-5F, -7F

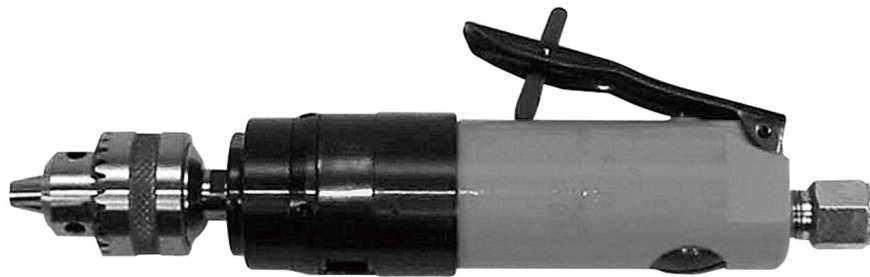

FRD-6S-5F, 7F

SPECIFICATIONS

MODEL		Drill Chuck	Chuck Capacity	Spindle Thread Size	Stall Torque	Max. Output	Rotational Frequency	Max. Air Consumption	Distance from Center to Side	Overall Length	Mass	Air Inlet Thread Size	Air Hose Size	
			mm		N·m	W	min ⁻¹	m ³ /min	mm	mm	kg		mm	
FRD-6S-5F	—	DCK-10	10	3/8-24UNF	6.9	290	1,300	0.68	23.0	237	1.1	Rc or NPT 1/4	9.5	
	W/O C	—	—	3/8-24UNF	6.9	290	1,300	0.68	23.0	237	1.1		Rc 1/4	9.5
	EC	DCK-10	10	3/8-24UNF	6.9	290	1,300	0.68	23.0	237	1.3		Rc 1/4	9.5
	W/O C EC	—	—	3/8-24UNF	6.9	290	1,300	0.68	23.0	237	1.3		Rc 1/4	9.5
FRD-6S-7F	—	DCK-13	13	1/2-20UNF	15.7	290	600	0.68	21.0	271	1.6	Rc 1/4	9.5	
	W/O C	—	—	1/2-20UNF	15.7	290	600	0.68	21.0	271	1.6	Rc 1/4	9.5	
	W/O C EC	—	—	1/2-20UNF	15.7	290	600	0.68	21.0	271	1.6	Rc 1/4	9.5	

* Please specify if you need a Drill Chuck or not.

* EC type comes with Dead handle.(FRD-6S-5F)

The performance figures are at 0.63MPa (6.3bar).

⚠ Refer to "The Instructions and Warning for Safety Use" enclosed in each tool box.

Fuji Industrial Technique Co.,Ltd.

2-1-14, Kamiji, Higashinari-ku, Osaka, 537-0003 Japan

Tel : 81-6-6972-2335

Fax : 81-6-6972-2380

9502000979 Rev.01